

6280 Commander

HYDRAULIC WALK-BEHIND SCRAPER


6280W (European model)



6280/6280W SPECIFICATIONS

Width	17.75"	45 cm
Max Height	46"	117 cm
Height (handle folded)	30"	76 cm
Max. Length	51"	130 cm
Length (handle folded)	29"	74 cm
Weight	425 lb	192.8 kg
Removable Weight	47 lb front, 43 lb side	22.2 kg front, 19.5 kg side
Weight (machine only)	335 lb	152 kg
Speed	10-45 ft/min	3.7-15.2 m/min
RPM	3450/2850	
Voltage	115/230	
Frequency	60/50 Hz	
HP	1.5	1.12 kW
Amps (full load)	13/7.5	

Meets declaration of conformity standards and is CE certified

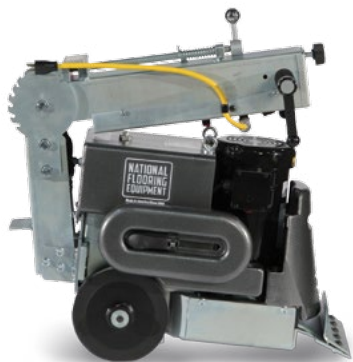

FEATURES

The 6280 removes the worst of today's soft goods such as glued down floors, gummy commercial carpet, VCT, sheet vinyl, rubber tile, linoleum, indoor and outdoor sport surfaces, roofing material and more. Its compact design makes it ideal for use in confined spaces, while the side slide weights add extra head pressure when forward and improved traction when moved over the back wheels.

- A. Ergonomically designed hand grips; hydraulic forward drive; self-propelled reverse drive; variable speed 10 to 45 feet per minute; manual drive system for throttle/speed control and smooth transitions
- B. Six handle positions for work under counters and other confined areas; collapses to save space during transport and storage
- C. Self-contained, limited-maintenance hydraulic fluid
- D. Lifting bail
- E. Secure-mount side slide weights adjust scraper-head pressure; slide the weights back to increase weight over travel wheels
- F. New rounded front weight design better deflects loose material during use
- G. Adjustable, self-cleaning, industrial-grade wheels disengage for easy maneuvering
- H. Motor equipped with thermal-overload-protection circuit-breaker cord to eliminate unnecessary strain
- I. Oscillating action rotates the cutting blade to cut through a range of materials over various substrates; extends life cycle of machine while reducing maintenance costs
- J. New transport-wheel rack hanger on back of 6280 redesign
- K. New design incorporates nine isolators for the toughest jobs



Included with the 6280 and 6280W

- 6280-299: Front-wheel assembly
- 6254: 50-foot, 12-gauge extension cord
- 148: 5" x 6" standard blade
- 6258: 3" x 12" self-scoring blade
- 6286: 3" x 10" heavy-duty blade
- 7050-200: 3" x 6" premium blade
- 7050-202: 3" x 10" premium blade
- 6280-320: Sliding weight package
- 6280-401B: 7/32 t-handle wrench
- 1009: Safety glasses
- Instruction manual
- One-year manufacturer's warranty on parts and labor